


TABLE A

RoHS Compliant

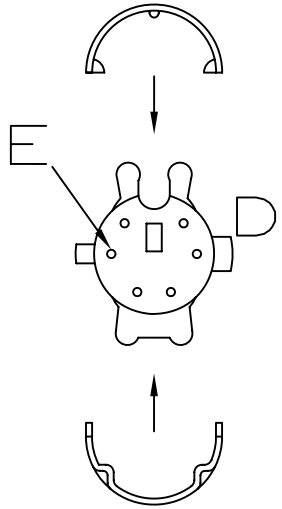



SPECIFICATIONS:

1. RATING: 100V AC 1A MAX
2. INSULATION RESISTANCE: 50M OHM MIN AT 500V DC.
3. DIELECTRIC STRENGTH: 500V AC / 1 MINUTE.
4. INSERTION FORCE: 4.5KG MAX.
5. WITHDRAWAL FORCE: 0.9KG ~ 3KG.

	7.0φ BACK SHELL
	6.0φ BACK SHELL
<input checked="" type="checkbox"/>	5.0φ BACK SHELL (STANDARD)
	COVER DIM.

TABLE A

MATERIAL:
 A. COVER: EVA+PE-LL
 B. SHELL: ABS(PA-757)
 C. METAL SHIELD:
 BRASS NICKEL PLATED
 D. HOUSING: PA6
 E. CONTACT:
 BRASS SILVER PLATED

 笙龍實業有限公司 SONION INDUSTRIAL CO., LTD.	
TOLERANCES .x ± 0.2 .xxx ± .xx ± 0.1 ANGLES 	PART NUMBER 62000SER
DRAFT W.RAY050410'	DESCRIPTION Mini Din plug Ass'y Type
CHECK JANNE HUNG	REV. 050410'
APPROVAL DANNY HSU	SHEET 1/1