

60620-1 ✓ ACTIVE

MATE-N-LOK | Commercial MATE-N-LOK


TE Internal #: 60620-1

Pin Contact, Tin, 250 VAC, 250 VDC, Locking Lance Contact Retention, 20 – 14 AWG Wire Size, .52 – 2.08 mm<sup>2</sup> Wire Size, Crimp, Commercial MATE-N-LOK

[View on TE.com >](#)



Connectors > Contacts > Connector Contacts

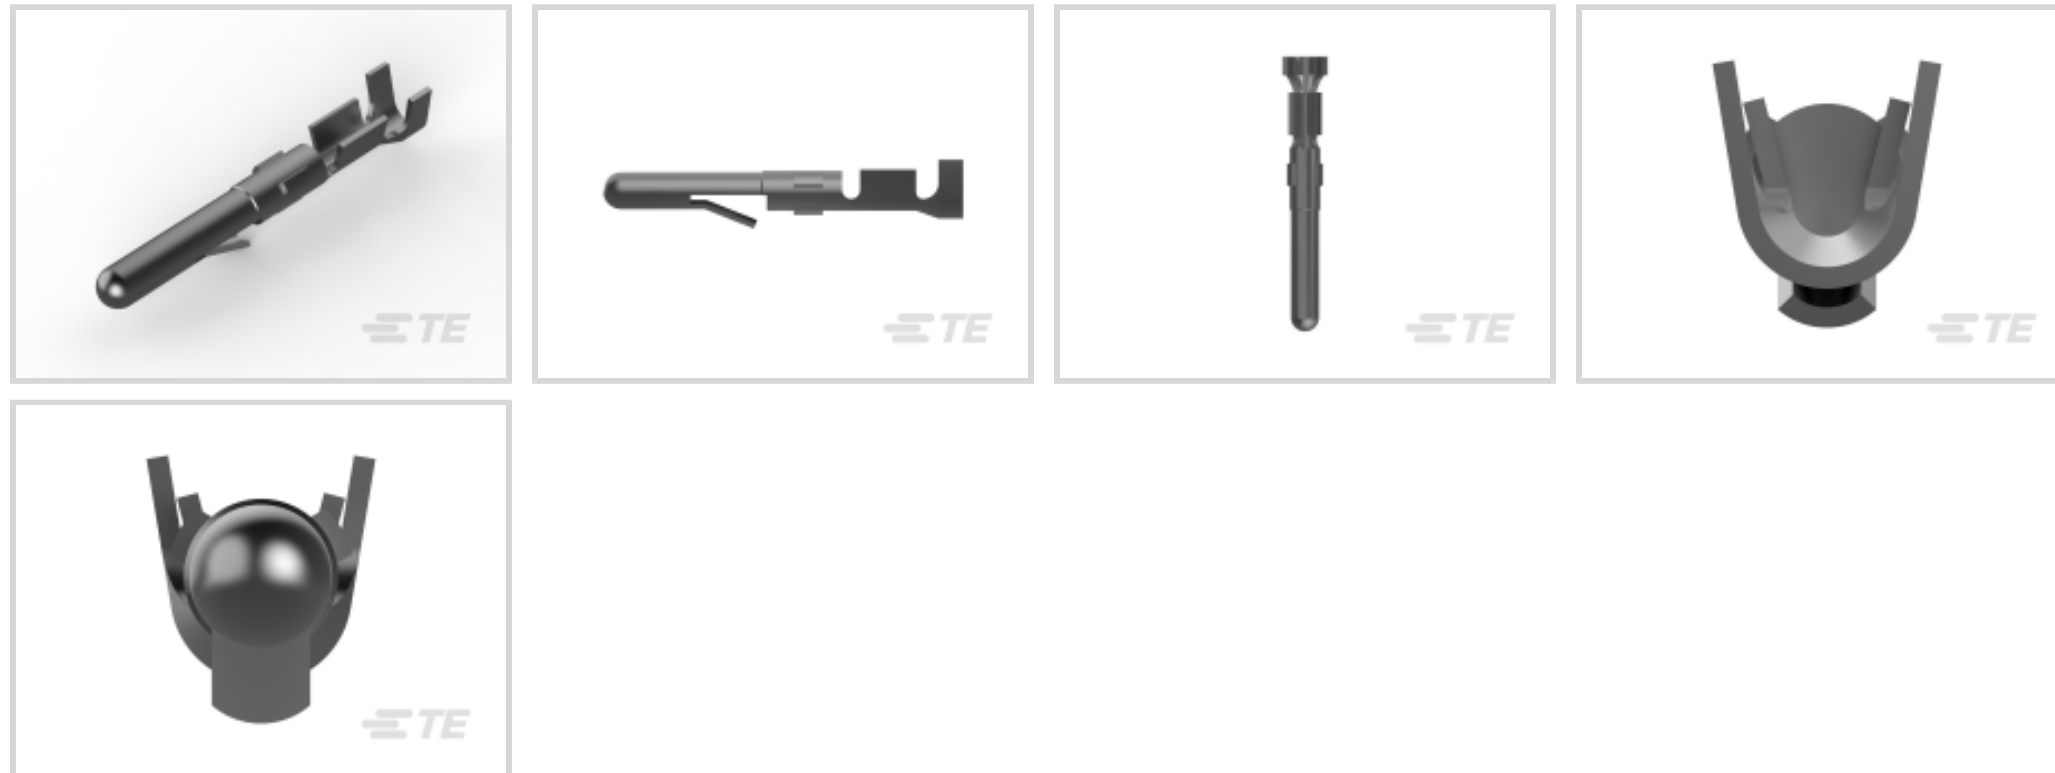

Contact Type: **Pin**

Contact Mating Area Plating Material: **Tin**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **250 VDC**

## Features

### Product Type Features

Discrete Wire Type **Stranded**

### Electrical Characteristics

Operating Voltage **250 VDC**

### Contact Features

Mating Pin Diameter **2.13 mm [.084 in]**

Wire Contact Termination Area Plating Thickness **.508 – .812 μm [20 – 32 μin]**

Wire Contact Termination Area Plating Material Finish **Bright**

Contact Shape & Form **Round**

Contact Orientation **Straight**

Barrel Type **Open**

Contact Type **Pin**

Contact Mating Area Plating Material **Tin**

Wire Contact Termination Area Plating Material **Pre-Tin**

Contact Retention Within Housing **With**

Contact Base Material **Brass**



Contact Current Rating (Max)	15 A
------------------------------	------

### Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

### Mechanical Attachment

Wire Insulation Support	Without
Contact Retention Type Within Housing	Locking Lance

### Dimensions

Compatible Insulation Diameter Range	3.3 mm [.13 in]
Wire Size	.52 – 2.08 mm <sup>2</sup>

### Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-2

### Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

## Product Compliance Disclaimer









This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts





## Also in the Series | Commercial MATE-N-LOK

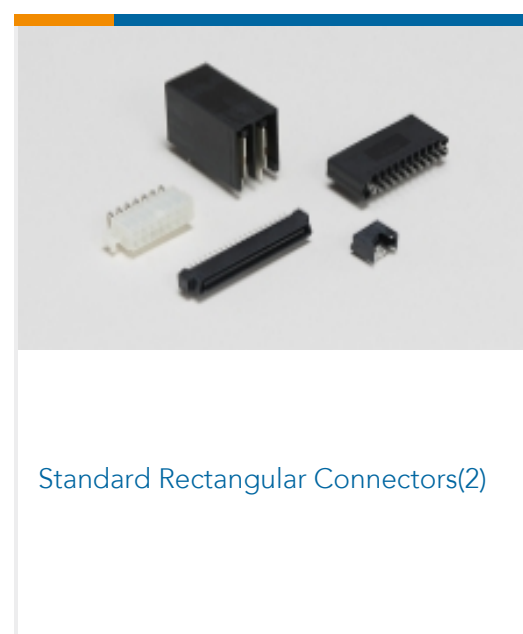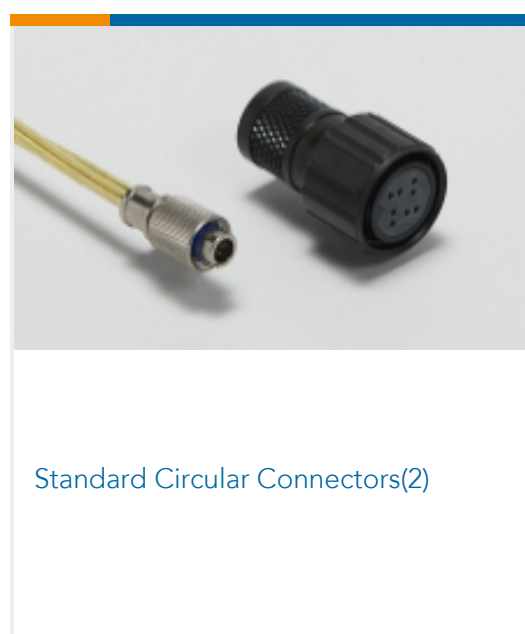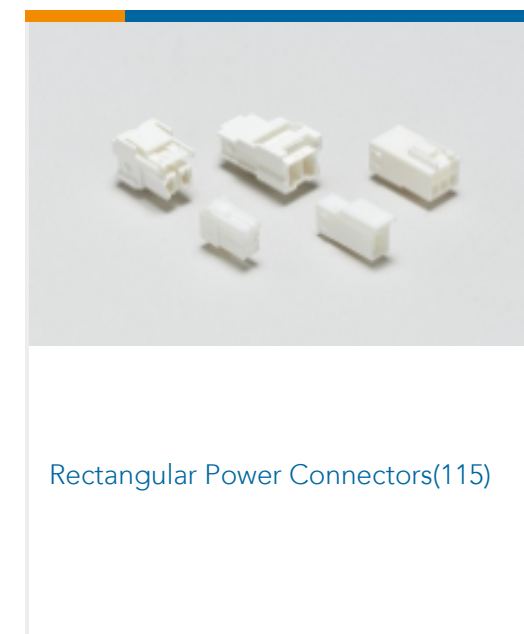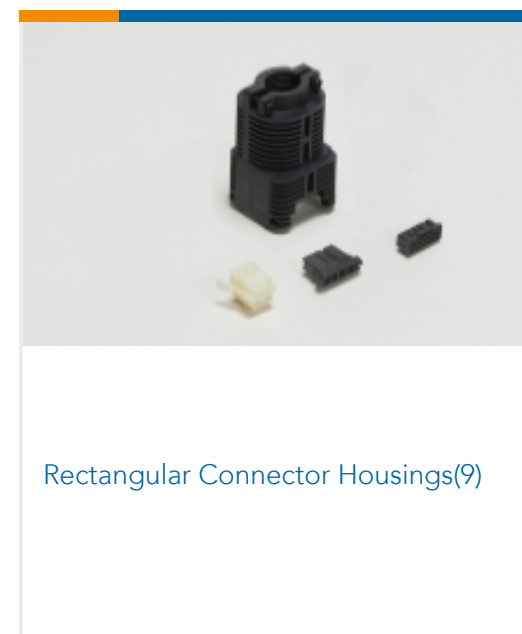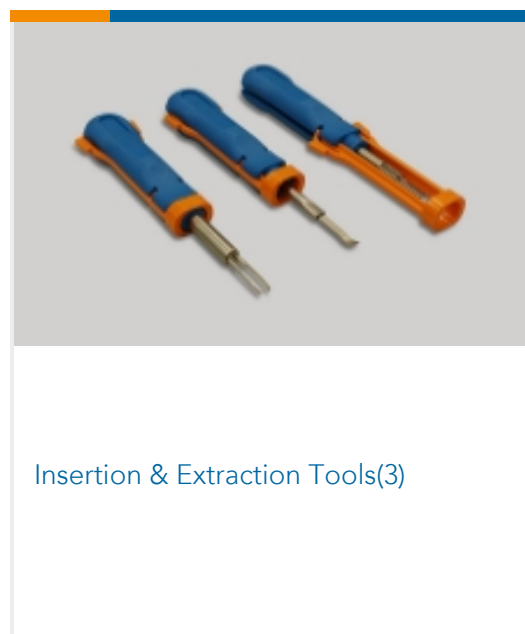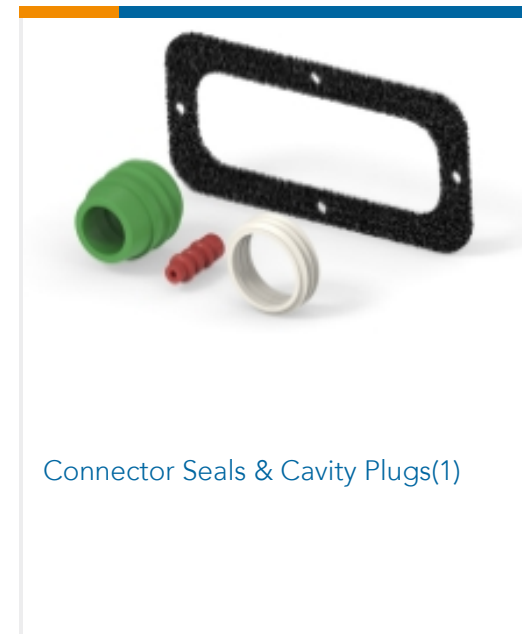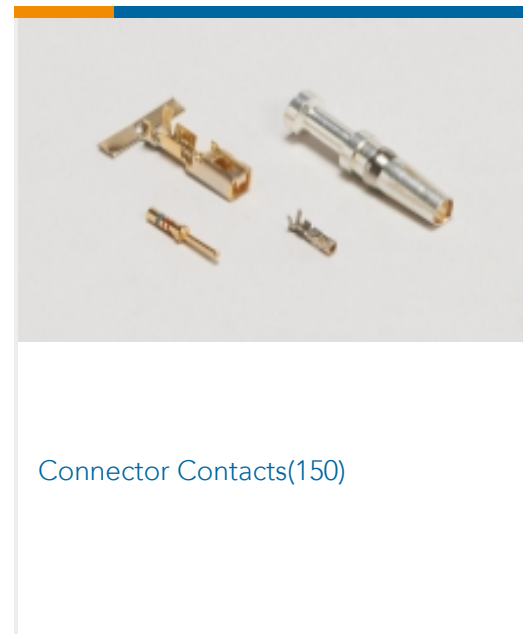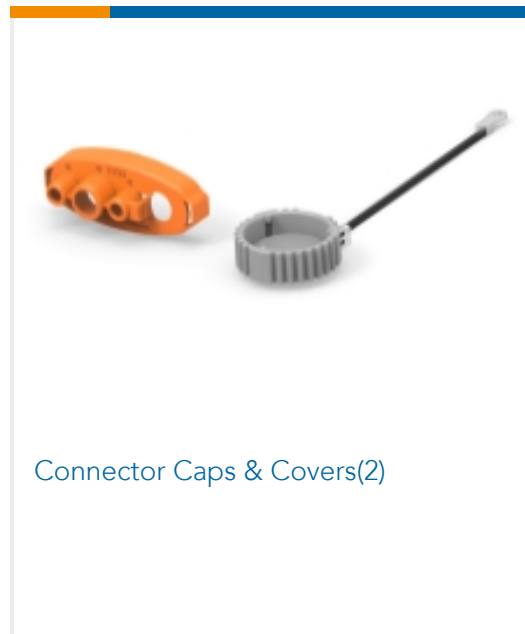

## Customers Also Bought



## Documents

### Product Drawings

CMNL PIN 20-14 TPBR L/P

English

### CAD Files

3D PDF

English

Customer View Model

[ENG\\_CVM\\_60620-1\\_S.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_60620-1\\_S.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_60620-1\\_S.3d\\_stp.zip](#)

English

3D PDF

3D



**Customer View Model**

[ENG\\_CVM\\_CVM\\_60620-1\\_Y.2d\\_dxf.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_60620-1\\_Y.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_60620-1\\_Y.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages**

[SOFT\\_SHELL\\_PIN\\_SOCKET\\_CONNECTORS\\_STANDARD\\_DENSITY](#)

English

---

**Product Specifications**

[Application Specification](#)

English

---

**Instruction Sheets**

[Instruction Sheet \(U.S.\)](#)

English