


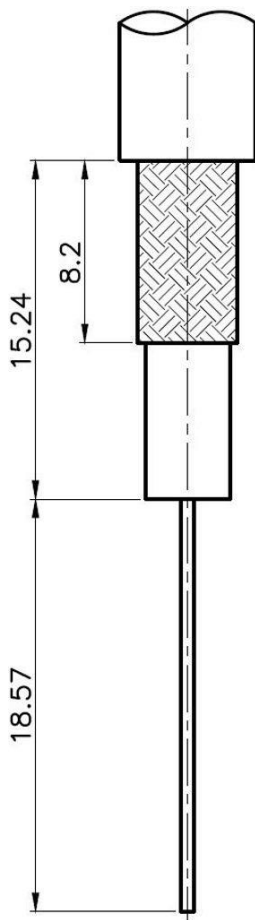
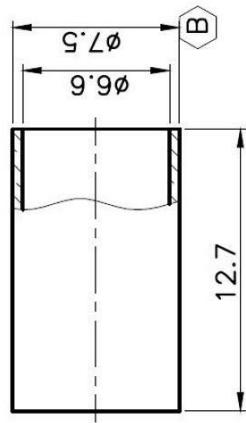


5/8-24UNEF-2B

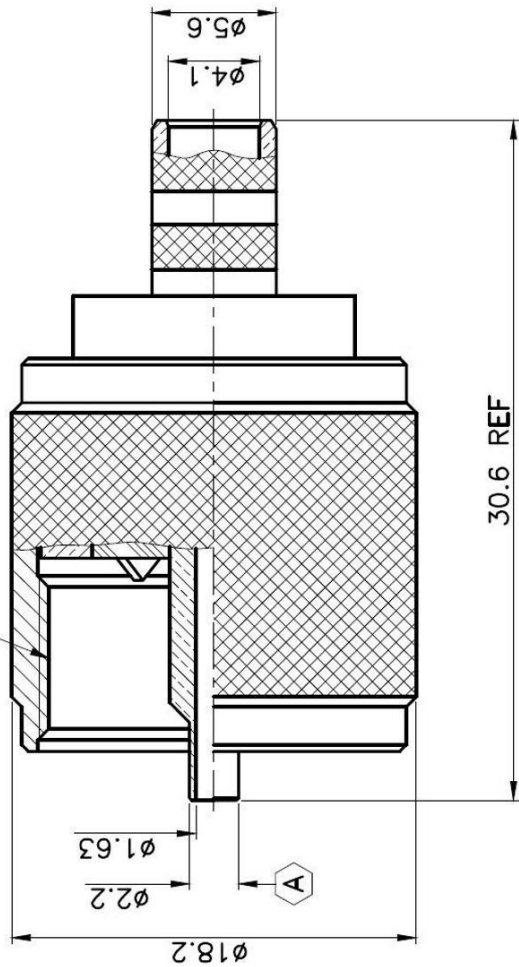

Die Size A



Die Size B

RECOMMENDED  
CABLE STRIPPING DIM'S



Max-Gain Systems, Inc.  
150 Dodd Street SE, Marietta, GA, 30060  
Phone: (770) 973-6251 | Fax: (678) 401-3854  
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: UHF male Crimp Connector for RG-223, RG-59,  
LMR-240, RG-8X mini 8, and other 0.240 Inch Coax

DRAWING NO: 7505-UHF-8X  
FILE NO :

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	UNIT: mm	SCALE: .	PART NO	DATE
	FERRULE	BRASS	SILVER				APPROVED	DATE
	SHELL	BRASS	SILVER				CHECKED	DATE
	PIN	BRASS	SILVER				DRAWN	DATE
	INSULATOR BODY	TEFLON	WHITE					
		BRASS	SILVER					

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 0.5-5 = ±0.2  
 5-30 = ±0.4  
 30-120 = ±0.6  
 120-315 = ±1  
 315-1000 = ±1.6  
 1000-2000 = ±2.4