


100 Ω CAT6 UTP 4pairs cable category6 - 250MHz - Eca LSZH sheath

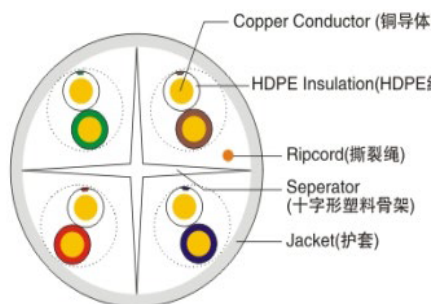

CABLE DESCRIPTION

1-CONDUCTOR	PARAMETER	UNIT	VALUE
TYPE:SOLID-Bare copper			
DIAMETER:0.56mm±0.005mm	Max.linear tesistance.	Ω/km	≤80
AWG: 23 AWG			
2-INSULATION	Mutual capacity(nom.)	pF/m	56
TYPE:HDPE	Unbalance capacity max	pF/km	1600
DIAMETER:1.03mm±0.05mm	(p/p at 1 KHz)		
3-SYNTHETICAL SEPARTION FOIL:			
4-DRAIN WIRE: no	Characteristic impedance	Ω	100±15
5-SHIELDING: no	(1 at 100 MHz)		
6-RIP CORD	VELOCITY OF PROPAGATION (f>1MHz)	%of c	66
YES			
7-OUTER JACKET	Marking		
TYPE: Eca LSZH	OUTDOOR CAT6 4x2x AWG 23/1 U/UTP		
COLOUR:GREY	PE (OUTDOOR) LAN CABLE UNSHIELDED		
THICKNESS: 0.55mm±0.05mm	250MHZ##supplier□No.		

Test Request: Network Analyzer 100m

ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Return loss(dB)	Attenuation (dB/100m)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT T (dB)
1	20	2	74	72	68	65
4	23	3, 8	65	63	56	53
8	25	5	61	59	50	47
10	25	6	59	57	48	45
16	25	7, 6	56	54	44	41
20	25	8, 5	55	53	42	39
25	24	10	53	51	40	37
31, 25	24	10, 7	52	50	38	35
62, 5	22	15, 4	47	45	32	29
100	20	19, 8	44	42	28	25
160	19	26	41	39	24	21
200	18	29	40	38	22	19
250	17	32, 8	38	36	20	17

OTHER CHARACTERISTICS

MINIMUM BENDING RADIUS:
FIRE BEHAVIOUR:IEC60332-2
PACKING: Cable Reel-spool



Wentronic GmbH
Pillmannstraße 12
38112 Braunschweig