



150 Dodd Street SE
Marietta, GA. 30060

Phone: 770-973-6251
Fax: 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

UHF female to BNC male Adapter



Technical Data Sheet

This UHF female to BNC male adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is a between series coaxial adapter.

This adapter is made from a Solid Brass body that is precision machined and plated with Nickel for superior performance and value. This UHF female to BNC male adapter has a Delrin dielectric and a gold plated brass center pin. The UHF female side (also known as a SO-239 connection) is by far the most popular connection type used in Amateur Radio. The BNC male side accepts the BNC female tabs or "bayonets" for quick and reliable connections and disconnections.

Material Specifications

UHF female to BNC male Adapter

Part Number 7060

Description	Material	Plating
Shell	Zinc Alloy	Nickel
Washer	Steel	Nickel
Spring	SK5	Nickel
Gasket	Rubber	Red
Center Pin	Brass	Gold
Insulator	Delrin	White
Body	Brass	Nickel

Mechanical Specifications


Size	Dimension
Length	1.29 in (32.9 mm)
Width	0.61 in (15.5 mm)
Height	0.61 in (15.5 mm)
Weight	0.7 oz (20 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the “SEARCH” bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: <https://mgs4u.com/product/uhf-female-to-bnc-male-adapter-better-7060/>

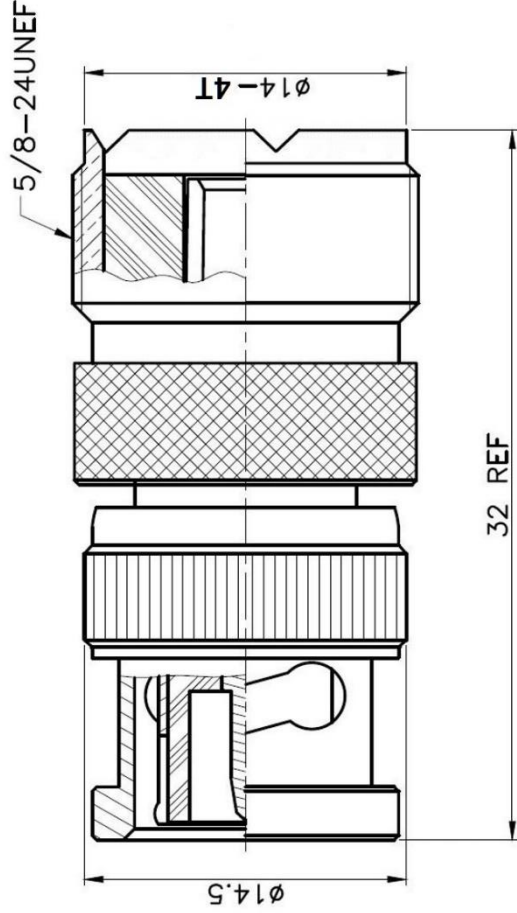

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA, 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: UHF female to BNC male Adapter

DRAWING NO: 7060

FILE NO : .

		PART NO	DATE							
		APPROVED	DATE							
		CHECKED	DATE							
		DRAWN	DATE							
		UNIT: mm								
		SCALE: .								
		UNLESS OTHERWISE SPECIFIED TOLERANCES								
		0.5-5 = ±0.2								
		5-30 = ±0.4								
		30-120 = ±0.6								
		120-315 = ±1.0								
		315-1000 = ±1.6								
		1000-2000 = ±2.4								
NO.	DESCRIPTION	MATERIAL	QTY	FINISH	NICKEL	RED	GOLD	WHITE	NICKEL	FINISH
1	SHELL	ZINC ALLOY	1		NICKEL					
1	WASHER	STEEL	1		NICKEL					
1	SPRING	SK5	1		NICKEL					
1	GASKET	RUBBER	1		RED					
1	PIN	BRASS	1		GOLD					
1	INSULATOR	DELTRIN	1		WHITE					
1	BODY	BRASS	1		NICKEL					
1	NO. DESCRIPTION	MATERIAL	QTY		FINISH					