


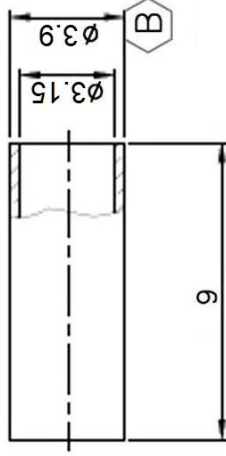
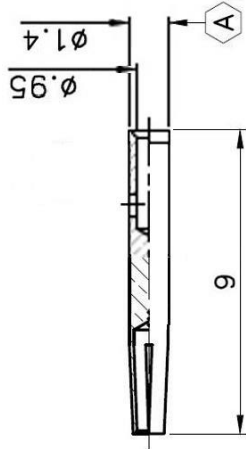


1/4-36UNS-2A

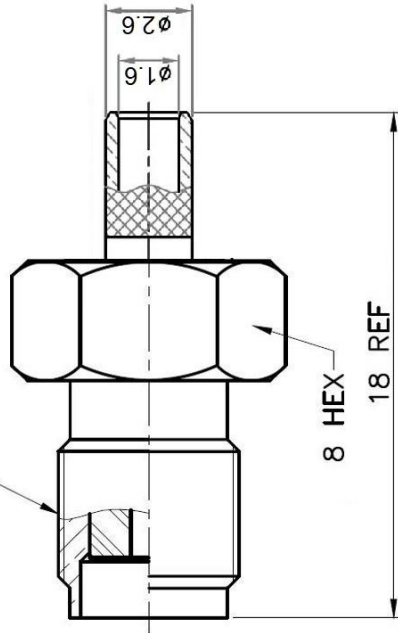


Die Size B



Die Size A

RECOMMENDED
CABLE STRIPPING DIM'S

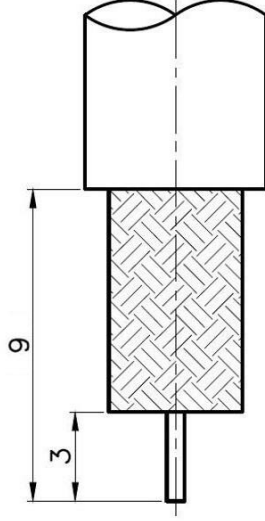

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA 30060
Phone: (770) 973-6251 | Fax: (678) 401-3654
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: SMA female Crimp Connector for RG-174,
RG-316, and LMR-100A Coax

DRAWING NO: 7806-SMA-174

CAGE CODE: 7JZZ8

	PART NO	DATE	
	APPROVED	DATE	
	CHECKED	DATE	
	DRAWN	DATE	
	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-5 = ±0.2 5-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4		
	UNIT: mm		
	SCALE: .		
FERRULE	BRASS	GOLD	1
PIN	PHOSPHOR BRONZE	GOLD	1
INSULATOR	TEFLON	WHITE	1
BODY	BRASS	GOLD	1
NO. DESCRIPTION	MATERIAL	FINISH	QTY