


# Hex nuts ~0,8d

BN 628

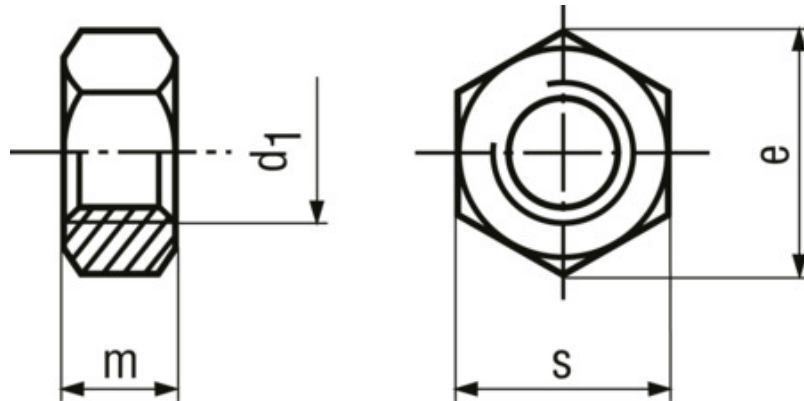

Standard

**DIN 934** (Standard withdrawn), ~ISO 4032, ~UNI 5588, ~ČSN 021401

Additional information

The commercial quality is class A2-70 / A4-70 (tensile strength 700 N/mm<sup>2</sup>) for M5-M24.

Material

Stainless steel

Material type

A2

Article no.	d1	e min.	s	m max.
1421786	M1	2,71	2,5	0,8
1421794	M1,2	3,28	3	1
1421808	M1,4	3,28	3	1,2
1241389	M1,6	3,41	3,2	1,3
1241397	M2	4,32	4	1,6
1241419	M2,3	4,88	4,5	1,8
1241427	M2,5	5,45	5	2
1241435	M2,6	5,45	5	2
1241443	M3	6,01	5,5	2,4
1241451	M3,5	6,58	6	2,8
1241478	M4	7,66	7	3,2
1241486	M5	8,79	8	4
1241494	M6	11,05	10	5
8303266	(M7)			
1241508	M8	14,38	13	6,5
1241516	M10	18,9	17	8
1241524	M12	21,1	19	10
1241532	M14	24,49	22	11
1241540	M16	26,75	24	13
1241559	M18	29,56	27	15
1241567	M20	32,95	30	16
1241575	M22	35,03	32	18

<b>Article no.</b>	<b>d1</b>	<b>e min.</b>	<b>s</b>	<b>m max.</b>
1241583	M24	39,55	36	19
1241591	M27	45,2	41	22
1241605	M30	50,85	46	24
1397354	M33	55,37	50	26
1129333	M36	60,79	55	29
1210114	M42	71,3	65	34